INSTRUCTION

LH-60528-A5

Wiring Instruciton

Color 1	**Red**	(+)
Color 2 or Cruise Light	**White**	(+)
Flash Pattern and SYNC	**Yellow**	(+) Momentarily touch + for next pattern
Asynchronous	**Green**	
Negative Ground	**Black**	(-)

* Connect the Yellow wire for 5 second go back to first pattern

Synchronized Flash Setting

1. Connect all the Yellow wires together, and touch the Yellow wires to the postive for 5 seconds, and then all the lights will go back to the first flash pattern and will flash in SYNC.

2. Momentarily touch the Yellow wires to the positive for next pattern.

Asynchronous Flash Setting

1. Connect all the Yellow wires together, and touch the Yellow wires to the postive for 5 seconds, and then all the lights will go back to the first flash pattern and will flash in SYNC.

2. Momentarily touch the Yellow wires to the positive for next pattern.

3. Connect all the Green wires of the lights you want to be asynchronous to the positive +, and the lights will flash asynchronously.

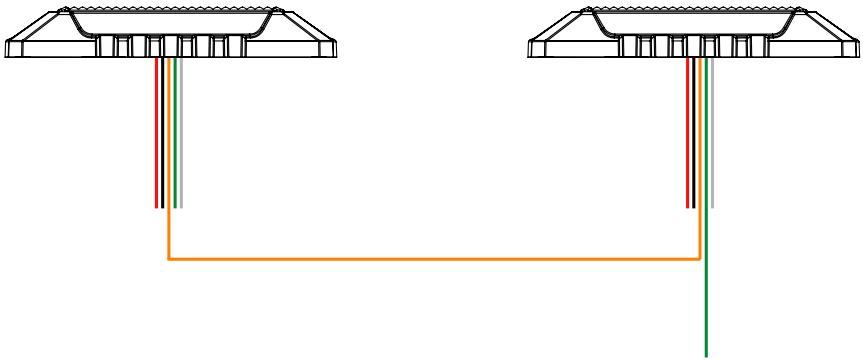

connect to the +, then this light will flash asynchronously

Flash Patterns

* FPM means how many cycles in a minute

NO.	PATTERNS.	FPM	MS
1	Single Flash (100% brightness)	150	400
2	Single Flash (50% brightness)	150	400
3	Double Flash (100% brightness)	150	400
4	Double Flash (50% brightness)	150	400
5	Slow Single Flash	75	800
6	Triple Flash	120	498
7	Quadruple Flash	120	498
8	Quintuple Flash	78	765
9	Single + Double	66	910
10	Single + Triple	61	990
11	Single + Quintuple	49	1230
12	Strobe Flash	600	100
13	Cruise (30% Brightness)		

Versions:









Color options:
Single color or Dual color





Warning Light
with Alley Light & Puddle Light



Corner Warning Light



Bracket